

FCU SERIES

Fan Coil Units



Technical introduction



Introduction to DFR Series of Fan Coil Units



DYN AIR® is the industrial division of Maico Italia S.p.A. and is a well known brand name at global level in the industrial ventilation and plant engineering sector. Technological expertise, high production capacities, strong research and investment policies together with a personalized back-up service focused on customer needs have, for over 30 years, been the qualities that distinguish our company: Italian excellence renowned throughout the world and an industrial concern fortified by belonging to Maico Holding GmbH, the German group that leads the way in the ventilation industry.

Experience and high technology at your service

Living in a market in continuous evolution, DYN AIR® bases its force on a step by step project follow-up in close collaboration with the customer to create tailored and highly reliable solutions.

With the new and wide range of Fan Coil Units and Air Handling Units, Dynair has diversified its current range of products to meet customers requirement in HVAC field. DYN AIR's products follow stringent policy of research and development. With safety as a priority during production, all products use top quality components that meet the relevant standards.


Our Total Quality policy is ensured by standard working procedures, with tests and inspections during all production phases.




Maico Ventilation Pvt. Ltd is ISO 9001: 2015 company certified.

With our production capability, wide range of finished products and components warehouse, we ensure quick delivery to all our customers. Our staff is trained and dedicated to provide before and after technical plus sales services.

Fan Coil Units - Nomenclature

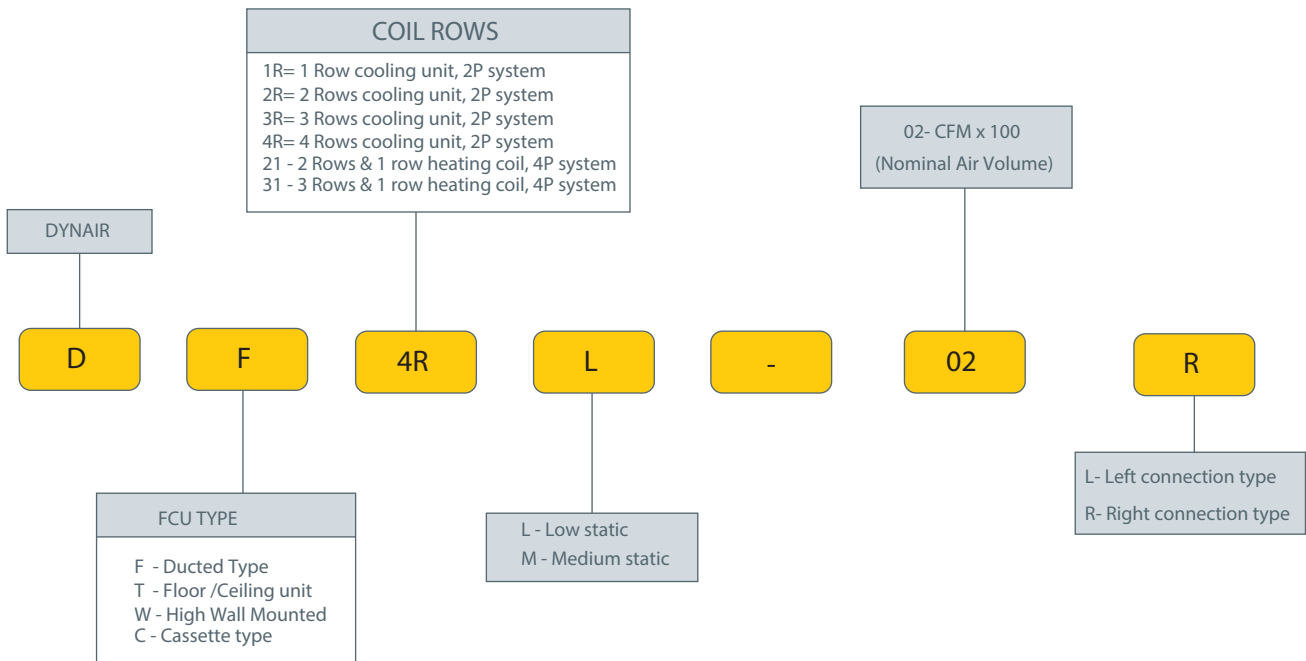

Special Features of Dynair Fan Coil Units

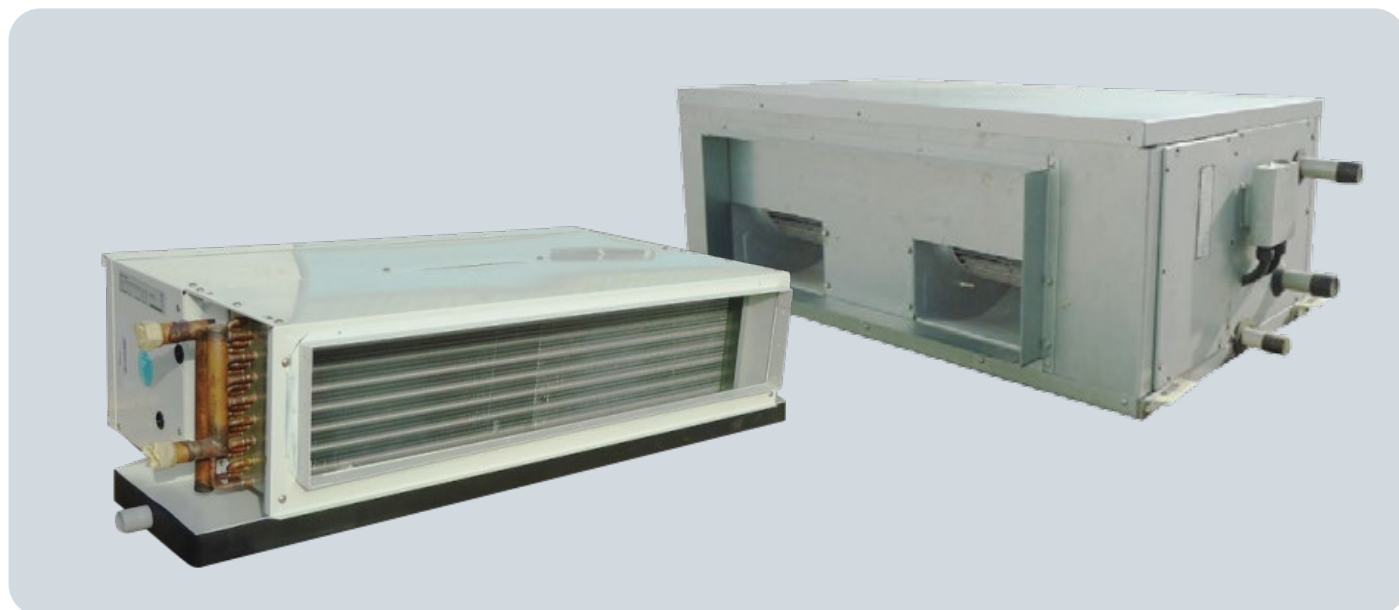

CASING

- 0.8/1.0mm thick – Galvanized sheet with G90, Powder coated finish.

INSULATION

- Closed cell Elastomer - 3mm thickness (Low static from 12-36K Btu/hr High static from 24-30K Btu/hr)
- Closed cell Elastomer - 6mm thickness (High static from 36-72K Btu/hr)
- Density – 48 Kg/m³
- Fire Self-extinguishing type

MOTOR

- Single-phase type suitable for 230 volts / 1 phase / 50 hertz electrical supply.
- Internal thermal overload protection and wired to unit junction box.
- Three speed for single phase motors
- Permanent split capacitor motor

FANS

- Centrifugal direct driven blower, 3 speed type
- Double inlet, Double width centrifugal type
- Forward curved type
- Statically and dynamically balanced for quieter and vibration free operation.
- High Efficiency & Low Noise

COILS

- Manufactured by State of art technology equipment.
- 5/16" & 3/8" OD diameter seamless Copper tubes.
- Aluminium blue fins are mechanically bonded to copper tubes
- Housed in Galvanized steel frames
- The coils are tested to 350 Psig of pressure
- Optional coils are available for District cooling applications with low GPM.

DRAIN PAN

- GI powder coating drain pan of 0.8 mm thick
- Insulated with closed cell Insulated with 6 mm thick
- Punched drain pan, no welding traces, coated with an epoxy finish
- SS Drain pan available as option

FILTER

- Washable panel filter 3mm thick–85%down to 20microns as standard

FEATURES OPTIONS

The following options can be provided:

- Valve Package
- Thermostat & Controls
- Auxiliary drain pan
- 4 Pipe system (3 Row cooling + 1 Row Heating)
- Aluminum filter 19 mm thick
- Electric Heater.
- Stainless steel drain pan

ENGINEERING SPECIFICATIONS OF LOW STATIC FAN COIL UNIT- DFRL



LOW STATIC - DFRL

SPECIFICATIONS						
Models		DF3RL-04 DF4RL-04	DF3RL-05 DF4RL-05	DF3RL-07 DF4RL-07	DF3RL-09 DF4RL-09	DF3RL-10 DF4RL-10
Nominal Capacity Cooling	Btu/Hr	12000	18000	24000	30000	36000
Heating (Electrical Heater)	Watts	2000	2000	2000	2000	2000
Nominal Airflow @ 4 Row Evap. Coil	CFM	360	455	663	852	909
Nominal Airflow @ 3 Row Evap. Coil		380	480	700	900	960
Fan Type		Double in Double width forward curved centrifugal Blowers, statically and dynamically balanced				
Fan Quantity		2	2	2	2	4
Motor Input	Watts	90	140	190	210	220
	Amps	0.4	0.6	0.9	0.92	1.1
	Qty	1	1	1	1	1
Insulation class of motor	Class B					
Heater Current (2.0 KW)	Amps	9	9	9	9	9
Power Supply	V-Ph-Hz	220-240 Volts / 1Ph / 50Hz				
Sound Pressure db(A)@ 1.5m	Low Speed	49	51	52	53	54
	Medium Speed	52	53	54	55	56
	High Speed	54	55	56	57	59
Water In-Out Connection Size	Inch (mm)	7/8" (22.225)				
Drain Pan Connection Size		3/4" (19.05)				
Unit Dimension						
Width	Inch (mm)	31.4 (800)	31.4 (800)	40.3 (1025)		49.4 (1255)
Depth		17.7 (450)	17.7 (450)	18.4 (469)		
Height		8.6 (220)	8.6 (220)	9.6 (245)		
Net Weight	Kg	20	20	23	23	28
Gross Weight	Kg	22	22	25	25	30

Notes: Nominal cooling capacity is based on 80°FDB / 66.2°F WB (27°C DB / 19°C WB) indoor air temperature. As a result of continues development and research, design and specifications are subject to change without notice.

Air Flow Performance Data of DFRL Series



AIR FLOW PERFORMANCE
3ROW COIL / 4 ROW COIL


Air Flow Performance Data - 3 Row Coil								
External Static Pressure (Pa)								
MODELS	SPEED	12.7	25.4	38.1	50.8	76.2	101.6	127
DF3RL-04	H	406	380	354	323			
	M	364	340	317	289			
	L	321	300	279	255			
DF3RL-05	H	513	480	447	408			
	M	460	430	400	365			
	L	406	380	354	323			
DF3RL-07	H	749	700	652	594			
	M	684	640	596	543			
	L	642	600	559	509			
DF3RL-09	H	963	900	838	764			
	M	866	810	754	688			
	L	749	700	652	594			
DF3RL-10	H	1027	960	894	815			
	M	930	870	810	739			
	L	866	810	754	688			

Air Flow Performance Data - 4 Row Coil								
External Static Pressure (Pa)								
MODELS	SPEED	12.7	25.4	38.1	50.8	76.2	101.6	127
DF4RL-04	H	385	360	335	305			
	M	341	319	297	271			
	L	306	286	267	243			
DF4RL-05	H	486	455	423	386			
	M	432	404	376	343			
	L	388	363	338	308			
DF4RL-07	H	709	663	617	563			
	M	643	601	559	510			
	L	613	573	533	486			
DF4RL-09	H	911	852	793	724			
	M	813	761	708	646			
	L	715	668	622	567			
DF4RL-10	H	972	909	846	772			
	M	874	817	760	693			
	L	827	773	720	657			



G. A. DRAWING
DF4RL UNITS

General Arrangement of low-Static Series

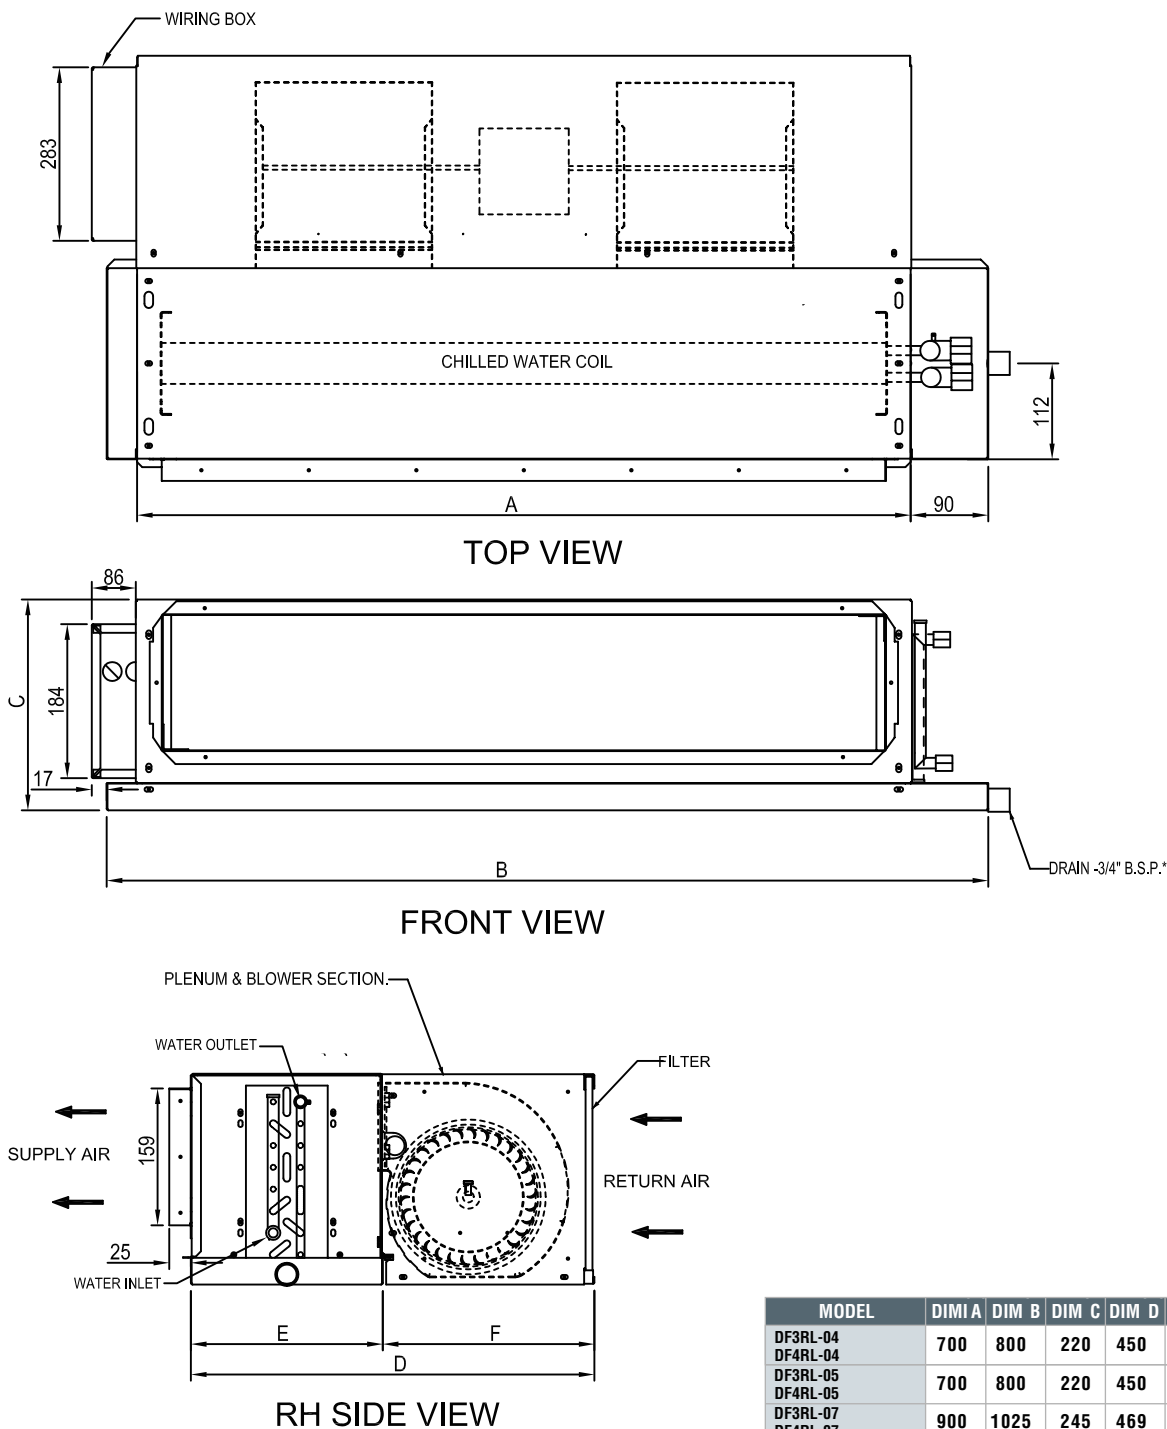

MODEL	DIM A	DIM B	DIM C	DIM D	DIM E	DIM F
DF3RL-04 DF4RL-04	700	800	220	450	223	227
DF3RL-05 DF4RL-05	700	800	220	450	223	227
DF3RL-07 DF4RL-07	900	1025	245	469	223	246
DF3RL-09 DF4RL-09	900	1025	245	469	223	246
DF3RL-10 DF4RL-10	1130	1255	245	469	223	246

BRITISH STANDARD PIPE THREADS
Dimensions and layouts shown above are subject to change without notice.

ENGINEERING SPECIFICATIONS OF MEDIUM STATIC FAN COIL UNIT - DFRM



MEDIUM STATIC - DFRM

SPECIFICATIONS							
Models*		DF3RM-07 DF4RM-07	DF3RM-09 DF4RM-09	DF3RM-12 DF4RM-12	DF3RM-16 DF4RM-16	DF3RM-18 DF4RM-18	DF3RM-20 DF4RM-20
Nominal Capacity Cooling	Btu/Hr	24050	30080	36000	48000	60000	72000
Heating (Electrical Heater)	Watts	2000	2000	3300	3300	3300	3300
Nominal Airflow @ 4 Row Evap. Coil	CFM	703	914	1155	1610	1757	2001
Nominal Airflow @ 3 Row Evap. Coil		720	950	1200	1650	1800	2050
Fan Type		Double in Double width forward curved centrifugal Blowers, statically and dynamically balanced					
Fan Quality		2	2	2	2	2	2
Motor Input	Watts	350	370	380	440	690	810
	Amps	1.6	1.7	1.75	2.0	3.2	3.7
	Qty	1	1	1	1	1	1
Insulation class	Class-B						
Heater Current	Amps	9	9	15	15	15	15
Power Supply	V-Ph-Hz	220-240 Volts / 1Ph / 50Hz					
Sound Pressure db(A)@ 1.5m	Low Speed	41	42	55	57	57	59
	Medium Speed	43	44	57	59	60	63
	High Speed	45	46	60	61	62	65
Water In-Out Connection Size	Inch (mm)	1 1/8" (28.575)					
Drain Pan Connection Size		3/4" (19.05)					
Unit Dimension							
Width	Inch (mm)	40.3 (1025)		43.3 (1100)		48 (1200)	
Depth		21 (535)		25.86 (657)		27 (696)	
Height		11.2 (285)		14.8 (378)		17 (435)	
Net Weight	Kg	38		69	73	81	
Gross Weight	Kg	40		71.5	75.5	83.5	

Notes: Nominal cooling capacity is based on 80°FDB / 66.2°F WB (27°C DB / 19°C WB) indoor air temperature. As a result of continues development and research, design and specifications are subject to change without notice.

AIR FLOW PERFORMANCE 3 ROW COIL / 4 ROW COIL




Air Flow Performance Data - 3 Row Coil								
External Static Pressure (Pa)								
MODELS	SPEED	12.7	25.4	38.1	50.8	76.2	101.6	127
DF3RM-07	H	847	792	760	720	642	582	518
	M	765	715	686	650	580	526	467
	L	682	638	612	580	517	469	417
DF3RM-09	H	1118	1045	1003	950	847	769	683
	M	977	913	876	830	740	671	597
	L	847	792	760	720	642	582	518
DF3RM-12	H	1412	1320	1267	1200	1070	971	863
	M	1282	1199	1151	1090	972	882	784
	L	1188	1111	1067	1010	901	817	726
DF3RM-16	H	1941	1815	1742	1650	1472	1335	1186
	M	1788	1672	1605	1520	1356	1230	1093
	L	1706	1595	1531	1450	1293	1173	1043
DF3RM-18	H	2118	1980	1901	1800	1606	1456	1294
	M	1918	1793	1721	1630	1454	1319	1172
	L	1835	1716	1647	1560	1392	1262	1122
DF3RM-20	H	2412	2255	2165	2050	1829	1658	1474
	M	2118	1980	1901	1800	1606	1456	1294
	L	2012	1881	1806	1710	1525	1383	1229

Air Flow Performance Data - 4 Row Coil								
External Static Pressure (Pa)								
MODELS	SPEED	12.7	25.4	38.1	50.8	76.2	101.6	127
DF4RM-07	H	827	773	742	703	627	568	505
	M	736	688	661	626	558	506	450
	L	658	615	591	559	499	453	402
DF4RM-09	H	1076	1006	965	914	815	739	657
	M	940	879	844	799	713	646	574
	L	817	764	733	695	620	562	499
DF4RM-12	H	1359	1270	1219	1155	1030	934	830
	M	1234	1154	1108	1049	936	849	754
	L	1146	1072	1029	974	869	788	700
DF4RM-16	H	1895	1771	1700	1610	1436	1303	1158
	M	1721	1609	1545	1463	1305	1184	1052
	L	1646	1539	1477	1399	1248	1132	1006
DF4RM-18	H	2067	1932	1855	1757	1567	1421	1263
	M	1846	1726	1657	1569	1399	1269	1128
	L	1771	1655	1589	1505	1342	1217	1082
DF4RM-20	H	2354	2201	2113	2001	1785	1618	1438
	M	2038	1906	1829	1733	1545	1402	1246
	L	1941	1815	1742	1649	1471	1334	1186

G. A. DRAWING
DF3RM/DF4RM-07
DF3RM/DF4RM-09 UNITS




General Arrangement of New Medium Static Series

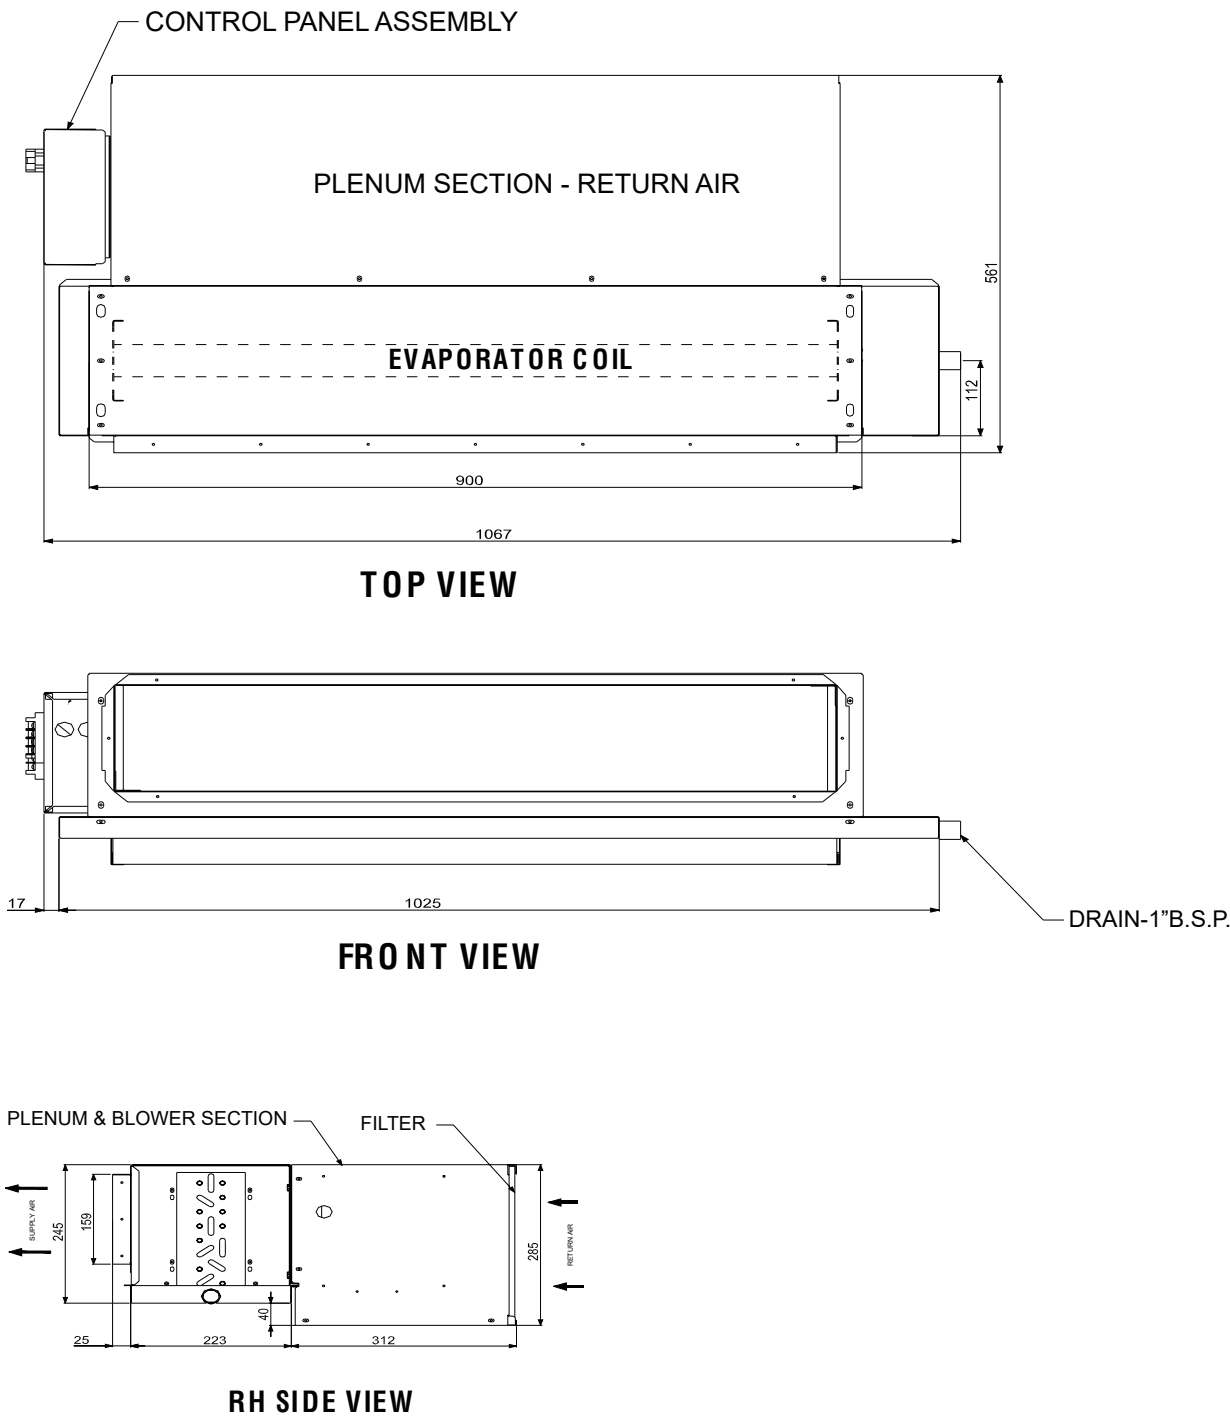

Dimensions and layouts shown above are subject to change without notice.

G. A. DRAWING
DF3RM/DF4RM-12
DF3RM/DF4RM-20 UNITS

General Arrangement of Medium Static Series

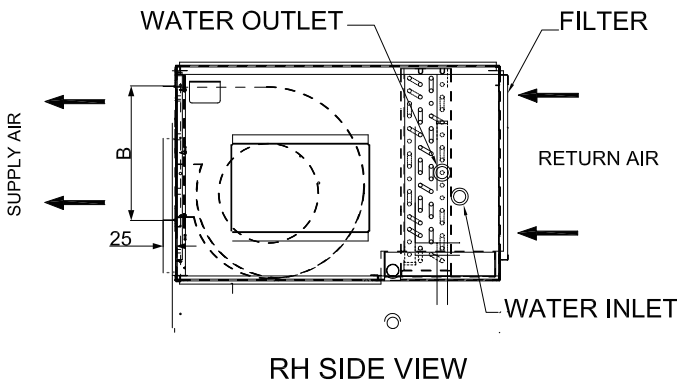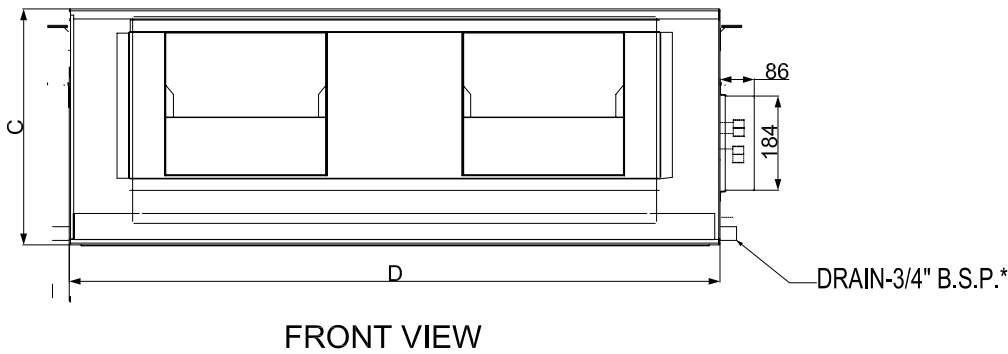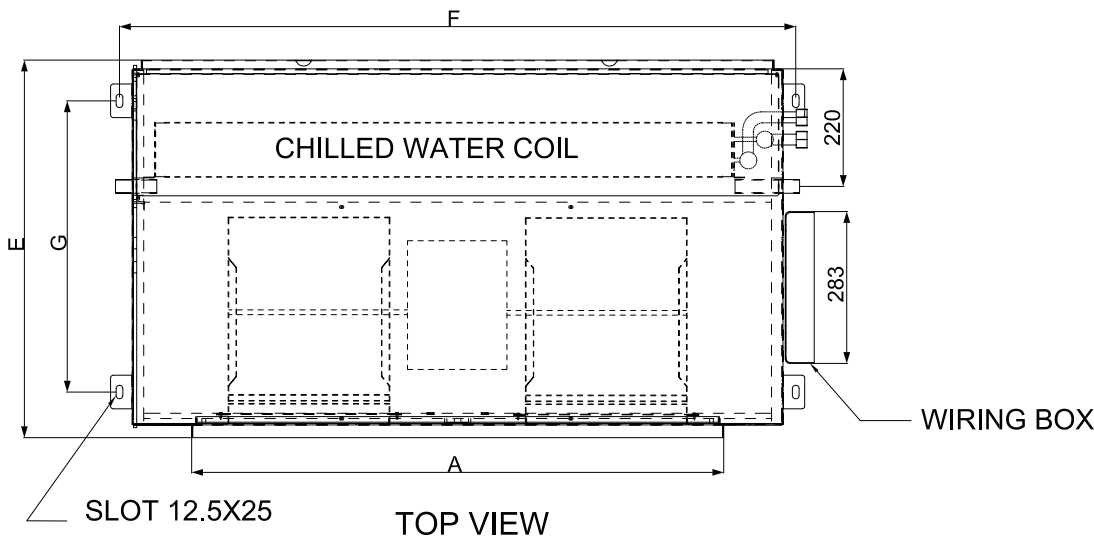

MODEL	DIM 'A' (mm)	DIM 'B' (mm)	DIM 'C' (mm)	DIM 'D' (mm)	DIM 'E' (mm)	DIM 'F' (mm)	DIM 'G' (mm)
DF3RM/DF4RM-12	978	243	378	1100	656	1147	497
DF3RM/DF4RM-16	978	243	378	1100	656	1147	497
DF3RM/DF4RM-18	982	272	435	1200	696	1247	537
DF3RM/DF4RM-20	982	272	435	1200	696	1247	537

Dimensions and layouts shown above are subject to change without notice.

Units are designed and manufactured to suit aesthetics of buildings. These units are designed for Normal and District cooling Applications.



DW-Series



DT-Series



DC-Series

TECHNICAL FEATURES:

- Manufactured from high grade Engineering plastic and corrosion resistant sheet metal
- Insulated to reduce condensation and noise levels
- High efficiency heat exchangers fabricated from seamless copper tubes mechanically bonded with Waffled fins for maximum heat transfer
- Low noise, with high efficiency cross flow blowers
- High efficiency, long life, high power factor, capacitor driven motor.
- Easy and flexible electrical wiring connections

COMPONENT FEATURES:

- Coils
Cooling coils are manufactured from seamless copper tubes mechanically bonded to high efficiency waffled fins for maximum heat transfer. Coils are factory leak tested at 450 psig. Air vent is standard part of unit. Coils are rated in accordance with ARI 410
- Fan Motor
These machines are having centrifugal low noise fans direct driven by single phase PSC motor. These motors have internal thermal protection, low temperature rise and are high efficient. They have high power factor and operate almost noiselessly with permanent lubricated sleeve bearings
- Casing
Units are constructed of high quality plastic material with ribs to support the load
- Filter
The units are provided with standard high efficiency filters (washable type)
- Blowers
The blowers are statically and dynamically balanced to minimize vibration and reduce noise levels

Technical Specification of Wall Mounted Units



SPECIFICATIONS OF CHILLED WATER WALL MOUNTED UNITS - DW2RL - DW3RL

MODEL (50Hz)		DW2RL-03	DW2RL-04	DW3RL-06	DW3RL-08
POWER SUPPLY (V, PH, HZ)		220/240-1-50			
UNIT PERFORMANCE					
NOMINAL COOLING CAPACITY	Btu/h	10000	13500	20000	28000
	Kcal/h	2520	3400	5040	7060
FAN	Type	CROSS FLOW FAN			
MOTOR	Qty	1			
	IP rating	24			
INSULATON CLASS		Class B			
NOMINAL AIR FLOW	CFM	300	400	600	800
COIL	No.of Rows	2		3	
	Tube Size mm (inch)	9.52 (3/8)			
	Fin Thickness (mm)	0.1			
	Tube Thickness (mm)	0.3			
	Working Pressure	250 psi			
	Tested Pressure	450 psi			
POWER INPUT	Watts	65	75	110	110
SOUND PRESSURE (HI/MED/LOW)	dB(A)@ 1m	44/41/38		48/45/42	
WATER PIPE SIZE					
WATER IN	mm (inch)	15.9(5/8)		19.05(3/4)	
WATER OUT	mm (inch)	15.9(5/8)		19.05(3/4)	
DRAIN LINE	mm (inch)	19.05(3/4)			
DIMENSIONS- UNIT					
WIDTH	mm (inch)	1030(41.2)		1450(57.1)	
DEPTH	mm (inch)	225(9)		240(9.4)	
HEIGHT	mm (inch)	315(12.6)		365(14.4)	
DIMENSIONS - PACKED (APPROXIMATE)					
WIDTH	mm (inch)	1120(44.8)		1540(60.6)	
DEPTH	mm (inch)	290(11.6)		335(13.2)	
HEIGHT	mm (inch)	375(15)		450(17.7)	
SHIPPING DATA					
NET WEIGHT	Kg (lbs)	17(37.5)	18(40)	24(52.8)	
GROSS WEIGHT	Kg (lbs)	19(42)	20(44)	27(59.4)	

NOMINAL COOLING CAPACITY BASED ON

NOMINAL COOLING CAPACITY BASED ON 80°F DB / 67°F WB (26.5°C DB/ 19.4 °C WB) INDOOR AIR TEMPERATURE & 45°F(7.2°C) ENTERING CHILLED WATER TEMPERATURE WITH 10°F(5.5°C)TEMPERATURE RISE..

AS A RESULT OF CONTINUOUS DEVELOPMENT AND RESEARCH, DESIGN AND SPECIFICATION ARE SUBJECTED TO CHANGE WITHOUT NOTICE.

Technical Specification of 4 Way Cassette Units



SPECIFICATIONS OF 4 WAY CHILLED WATER CASSETTE UNITS - DC1RL - DC2RL

MODEL(50HZ)		DC2RL-03	DC2RL-04	DC1RL-06	DC2RL-08	DC2RL-10
POWER SUPPLY (V,PH,HZ)		220 / 240 – 1 – 50				
UNIT PERFORMANCE						
NOMINAL COOLING CAPACITY	Btu/h	9000	12000	18000	24000	30000
	Kcal/h	2270	3030	4536	6048	7560
FAN	Type	FORWARD CURVED CENTRIFUGAL BLOWERS				
	Qty	1				
MOTOR	IP rating	24				
	Insulation Class	Class -B				
NOMINAL AIR FLOW	CFM	340	400	600	800	1000
COIL	No.of Rows	2	2	1	2	2
	Tube Thickness (mm)	0.3	0.3	0.3	0.3	0.3
	Fin Thickness(mm)	0.1	0.1	0.1	0.1	0.1
	Tube Size mm (inch)	7.00 IGT	7.00 IGT	9.52 (3/8) IGT	7.00 MM IGT	7.00 MM IGT
	Working pressure	250psi				
	Tested pressure	450psi				
POWER INPUT	Watts	40	40	150	150	150
SOUND PRESSURE (at 1.0m)*	dB(A)	47	48	49	56	57
WATER PIPE CONNECTION	FLARE NUT		FEMALE THREAD			
WATER IN (SIZE)	mm (inch)	15.9 (5/8)		19.05(3/4)	19.05(3/4)	19.05(3/4)
WATER OUT (SIZE)	mm (inch)	15.9 (5/8)		19.05(3/4)	19.05(3/4)	19.05(3/4)
DRAIN LINE	mm (inch)	19.1 (3/4)		25.4 (1.0)		
DIMENSIONS – UNPACKED UNIT						
WIDTH	mm (inch)	580 (22.83)		850(33.46)	850(33.46)	850(33.46)
DEPTH	mm (inch)	580 (22.83)		850(33.46)	850(33.46)	850(33.46)
HEIGHT	mm (inch)	275 (10.8)		280 (11.02)	280 (11.02)	280 (11.02)
DIMENSIONS-PACKED (APPROX)						
WIDTH	mm (inch)	735 (29.9)		930(36.6)	930(36.6)	930(36.6)
DEPTH	mm (inch)	665 (26.1)		920(36.2)	920(36.2)	920(36.2)
HEIGHT	mm (inch)	365 (14.3)		370 (14.6)	370 (14.6)	370 (14.6)
DIMENSIONS – PANEL						
WIDTH	mm (inch)	650 (25.5)		950(37.40)	950(37.40)	950(37.40)
DEPTH	mm (inch)	650 (25.5)		950(37.40)	950(37.40)	950(37.40)
HEIGHT	mm (inch)	30 (1.18)		55 (2.17)	55 (2.17)	55 (2.17)
DIMENSIONS – PANEL PACKED(APPROX.)						
WIDTH	mm (inch)	710(27.9)		1020(40.16)	1020(40.16)	1020(40.16)
DEPTH	mm (inch)	710(27.9)		1015(39.96)	1015(39.96)	1015(39.96)
HEIGHT	mm (inch)	120 (4.72)		110 (4.33)	110 (4.33)	110 (4.33)
SHIPPING DATA						
Net weight	kg (1bs)	28.6 (63.2)		34 (75.2)	35 (77.35)	35 (77.35)
Gross weight	kg (1bs)	38.4 (84.6)		44 (98)	45 (99.45)	45 (99.45)

NOMINAL COOLING CAPACITY BASED ON

NOMINAL COOLING CAPACITY BASED ON 80°F DB / 67°F WB (26.5°C DB/ 19.4 °C WB) INDOOR AIR TEMPERATURE & 45°F(7.2°C) ENTERING CHILLED WATER TEMPERATURE WITH 10°F(5.5°C)TEMPERATURE RISE..

AS A RESULT OF CONTINUOUS DEVELOPMENT AND RESEARCH, DESIGN AND SPECIFICATION ARE SUBJECTED TO CHANGE WITHOUT NOTICE.

Technical Specification of Floor / Ceiling Units



SPECIFICATIONS OF CHILLED WATER FLOOR / CEILING UNITS

MODEL(50HZ)		DT3RL04	DT3RL06	DT3RL08	DT3RL10	DT3RL12
POWER SUPPLY (V,PH,HZ)		220/240 – 1 – 50				
UNIT PERFORMANCE						
NOMINAL COOLING CAPACITY	Btu/h	12000	18000	24000	30000	36000
	Kcal/h	3030	4545	6060	7550	9090
FAN	Type	DIDW FORWARD CURVED CENTRIFUGAL BLOWERS				
	Qty	2	2	3	4	4
MOTOR	IP rating	24				
	Insulation class	Class B				
NOMINAL AIR FLOW	CFM	400	600	800	1000	1200
COIL	No.of Rows	3	3	3	3	3
	Tube Size mm(inch)	9.52 (3/8)				
	Tube thickness	0.3				
	Fin thickness	0.1				
	Working Pressure	250psi				
	Tested Pressure	450psi				
POWER INPUT	Watts	75		120	175	
SOUND	dB(A) @ 1m	47/43/40		52/49/46	53/50/49	
WATER PIPE SIZE						
WATER IN	mm (inch)	15.9(5/8)		19.05(3/4)		
WATER OUT	mm (inch)	15.9(5/8)		19.05(3/4)		
DRAIN LINE	mm (inch)	19.1 (3/4)				
DIMENSIONS – UNIT						
WIDTH	mm (inch)	995(39.8)		1285(51.4)	1610(64.4)	
DEPTH	mm (inch)	200 (8)		200(8)	240(9.6)	
HEIGHT	mm (inch)	660(26.4)				
DIMENSIONS - PACKED (APPROXIMATE)						
WIDTH	mm	1075(43)		1365(54.6)	1690(67.6)	
DEPTH	mm	280(11.2)		280(11.2)	320(12.8)	
HEIGHT	mm	765				
SHIPPING DATA						
Net weight	kg	30		34	52	
Gross weight	kg	37		42	62	

NOMINAL COOLING CAPACITY BASED ON

NOMINAL COOLING CAPACITY BASED ON 80°F DB / 67°F WB (26.5°C DB/ 19.4 °C WB) INDOOR AIR TEMPERATURE & 45°F(7.2°C) ENTERING CHILLED WATER TEMPERATURE WITH 10°F(5.5°C)TEMPERATURE RISE..

AS A RESULT OF CONTINUOUS DEVELOPMENT AND RESEARCH, DESIGN AND SPECIFICATION ARE SUBJECTED TO CHANGE WITHOUT NOTICE.


Air Flow Performance Data And Dimension Details of Decorative Units



AIR FLOW CHART (CFM)


	MODEL NO.	HIGH	MEDIUM	LOW
	DW2RL-03	300	270	240
	DW2RL-04	400	360	320
	DW3RL-06	600	550	500
	DW3RL-08	800	740	700
	DT3RL-04	400	370	370
	DT3RL-06	600	550	520
	DT3RL-08	800	750	700
	DT3RL-10	1000	900	900
	DT3RL-12	1200	1100	1050
	DC2RL-03	340	300	270
	DC2RL-04	400	370	340
	DC1RL-06	600	550	500
	DC2RL-08	800	750	700
	DC2RL-10	1000	950	900

GENERAL ARRANGEMENT DRAWING WALL MOUNTED UNITS

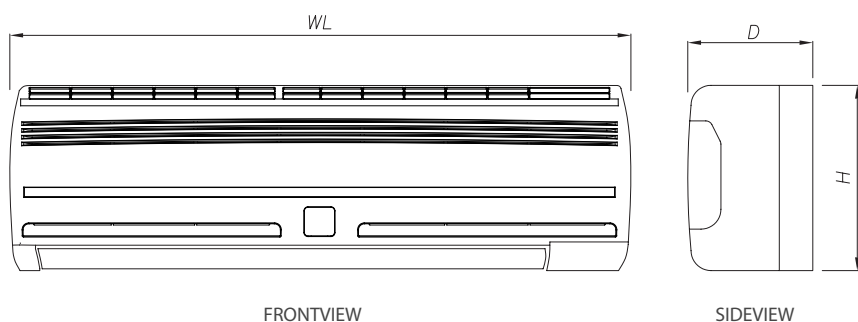


MODELS	UNIT OUTLINE DIMENSIONS		
	W mm	D mm	H mm
DW2RL-03/04	1030	225	315
DW3RL-06/08	1450	240	365

GENERAL ARRANGEMENT DRAWING 4 WAY CASSETTE TYPE UNITS

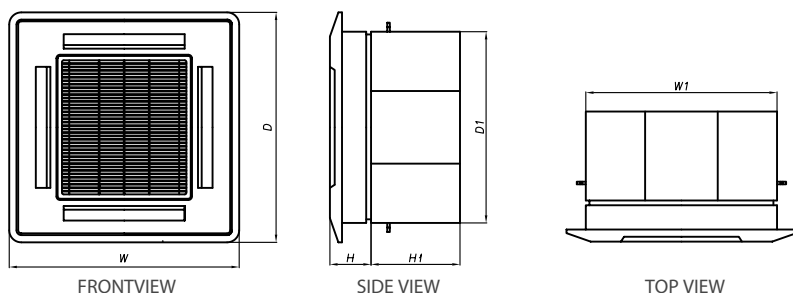

MODELS	UNIT OUTLINE DIMENSIONS					
	FRONT PANEL			UNIT		
	W mm	D mm	H mm	W1 mm	D1 mm	H1 mm
DC2RL03/04	650	650	30	580	580	275
DC1RL-06 DC2RL-08/10	950	950	55	850	850	280

GENERAL ARRANGEMENT DRAWING FLOOR / CEILING UNIT

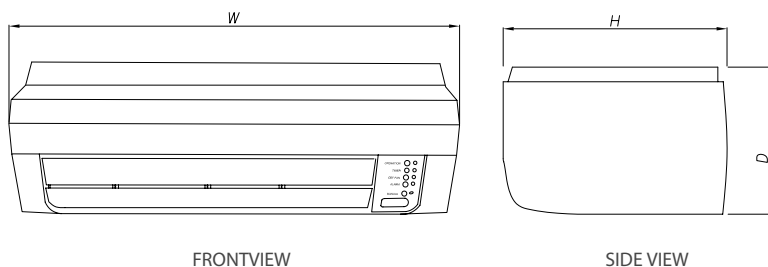

MODELS	UNIT OUTLINE DIMENSIONS		
	FRONT PANEL		UNIT
	W mm	D mm	H mm
DT3RL04/06	995	200	660
DT3RL08	1285	200	660
DT3RL10/12	1610	240	660



MAICOPlot-I-02, (Part-1), Khed City, Rajgurunagar Pune - 410 505
Tel: +91 77 678 000

Code:FCU/09/16

www.maico.co.in
enquiry@maico.co.in

Features and technical data can vary without prior notice without modifying the main functional parameters of the products. All trademarks mentioned are the property of Maico. All rights reserved.